



inserts:		page
CD .....	80 poles + ⊕	46
CDD .....	144 poles + ⊕	59
CQE .....	64 poles + ⊕	78
CN .....	32 poles + ⊕	84
CCE .....	32 poles + ⊕	94
CNE, CSE.....	32 poles + ⊕	95
CSS .....	32 poles + ⊕	102
CMSE .....	12+4 (aux) poles + ⊕	120
CMCE .....	12+4 (aux) poles + ⊕	120
CME .....	12+4 (aux) poles + ⊕	121
CP.....	12 poles + ⊕	128
MIXO .....	4 + 4 modules	137÷151

insert centre distance:  
2 x (77.5 x 27) mm

**bulkhead mounting housings with 2 levers or 4 pegs**



**bulkhead mounting housings with single lever**




description	part No.	part No.
with one or two levers	<b>CHI 32</b>	<b>CHI 32 L</b>
with pegs and cover <sup>1)</sup>	<b>CHI 32 CS</b>	
with lever and cover		<b>CHI 32 LS</b>

<sup>1)</sup> May be combined with hoods:  
- CHO/CHV/CFO/CFV 32 X  
- MHO/MHV/MFO/MFV 32 X


**N.B.:** the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.  
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

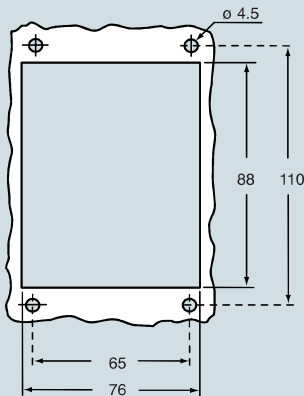


dimensions in mm

**CHI**

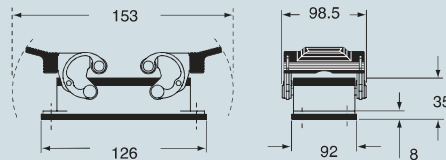


**CHI CS**

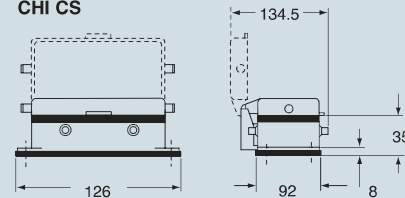


dimensions in mm

**CHI L**

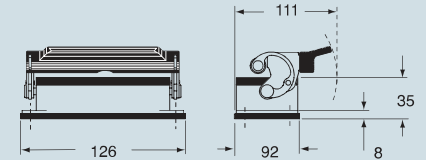

**CHI LS**

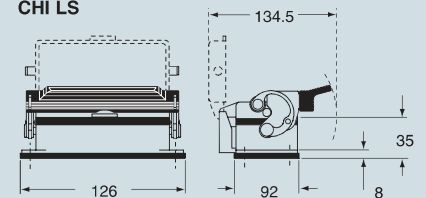

**CAUS**® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 77.62



inserts:		page
CD .....	80 poles + ⊕	46
CDD .....	144 poles + ⊕	59
CQE .....	64 poles + ⊕	78
CN .....	32 poles + ⊕	84
CCE .....	32 poles + ⊕	94
CNE, CSE.....	32 poles + ⊕	95
CSS .....	32 poles + ⊕	102
CMSE .....	12+4 (aux) poles + ⊕	120
CMCE .....	12+4 (aux) poles + ⊕	120
CME .....	12+4 (aux) poles + ⊕	121
CP .....	12 poles + ⊕	128
MIXO .....	4 + 4 modules	137+151

insert centre distance:  
2 x (77.5 x 27) mm

surface mounting housings with 2 levers



surface mounting housings with single lever




description	part No.		part No.		part No.		part No.	
		entry Pg		entry M		entry Pg		entry M
with one or two levers	<b>CHP 32.29</b>	29	<b>MHP 32.40</b>	40	<b>CHP 32 L29</b>	29	<b>MHP 32 L40</b>	40
with one or two levers	<b>CHP 32.229</b>	29 x 2	<b>MHP 32.240</b>	40 x 2	<b>CHP 32 L229</b>	29 x 2	<b>MHP 32 L240</b>	40 x 2
with one or two levers	<b>CHP 32</b>	36	<b>MHP 32.50</b>	50	<b>CHP 32 L</b>	36	<b>MHP 32 L50</b>	50
with one or two levers	<b>CHP 32.2</b>	36 x 2	<b>MHP 32.250</b>	50 x 2	<b>CHP 32 L2</b>	36 x 2	<b>MHP 32 L250</b>	50 x 2
with one or two levers	<b>CHP 32.42</b>	42			<b>CHP 32 L42</b>	42		
with one or two levers	<b>CHP 32.242</b>	42 x 2			<b>CHP 32 L242</b>	42 x 2		
with lever and cover					<b>CHP 32 LS29</b>	29	<b>MHP 32 LS40</b>	40
with lever and cover					<b>CHP 32 LS229</b>	29 x 2	<b>MHP 32 LS240</b>	40 x 2
with lever and cover					<b>CHP 32 LS</b>	36	<b>MHP 32 LS50</b>	50
with lever and cover					<b>CHP 32 LS2</b>	36 x 2	<b>MHP 32 LS250</b>	50 x 2
with lever and cover					<b>CHP 32 LS42</b>	42		
with lever and cover					<b>CHP 32 LS242</b>	42 x 2		

**N.B.:** the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.  
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.


dimensions in mm

CHP and MHP

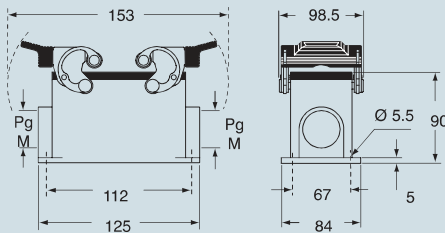


dimensions in mm

CHP L and MHP L

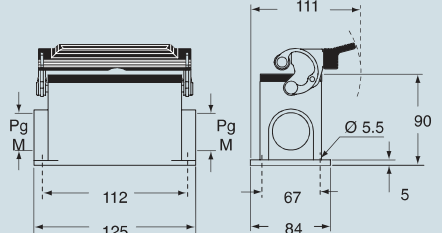

CHP LS and MHP LS

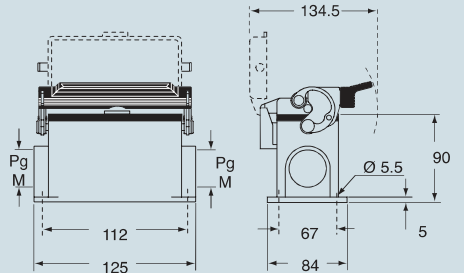

dimensions indicated are not binding and may be changed without notice

size 77.62



inserts:		page
CD .....	80 poles + ⊕	46
CDD .....	144 poles + ⊕	59
CQE .....	64 poles + ⊕	78
CN .....	32 poles + ⊕	84
CCE .....	32 poles + ⊕	94
CNE, CSE.....	32 poles + ⊕	95
CSS .....	32 poles + ⊕	102
CMSE .....	12+4 (aux) poles + ⊕	120
CMCE .....	12+4 (aux) poles + ⊕	120
CME .....	12+4 (aux) poles + ⊕	121
CP.....	12 poles + ⊕	128
MIXO .....	4 + 4 modules	137+151

insert centre distance:  
2 x (77.5 x 27) mm

hoods with 2 levers or 4 pegs



hoods with single lever or 2 pegs




description	part No.		part No.		part No.		part No.	
		entry Pg		entry M		entry Pg		entry M
with pegs, side entry	CHO 32.29	29	MHO 32.32	32	CHO 32 L	36	MHO 32 L40	40
with pegs, side entry	CHO 32	36	MHO 32.40	40				
with pegs, side entry	CHO 32.42	42	MHO 32.50	50				
with pegs, side entry, without adaptor *	CFO 32.29	29	MFO 32.32	32	CFO 32 L	36	MFO 32 L40	40
with pegs, side entry, without adaptor *	CFO 32	36	MFO 32.40	40				
with pegs, side entry, without adaptor *	CFO 32.42	42	MFO 32.50	50				
with pegs, top entry	CHV 32.29	29	MHV 32.32	32	CHV 32 L	36	MHV 32 L40	40
with pegs, top entry	CHV 32	36	MHV 32.40	40				
with pegs, top entry	CHV 32.42	42	MHV 32.50	50				
with pegs, top entry, without adaptor *	CFV 32.29	29	MFV 32.32	32	CFV 32 L	36	MFV 32 L40	40
with pegs, top entry, without adaptor *	CFV 32	36	MFV 32.40	40				
with pegs, top entry, without adaptor *	CFV 32.42	42	MFV 32.50	50				
with levers and gasket, top entry	CHV 32 G29	29	MHV 32 G32	32	CHV 32 LG	36	MHV 32 LG40	40
with one or two levers and gasket, top entry	CHV 32 G	36	MHV 32 G40	40				
with levers and gasket, top entry	CHV 32 G42	42	MHV 32 G50	50				
with levers and gasket, top entry, without adaptor *	CFV 32 G29	29	MFV 32 G32	32	CFV 32 LG	36	MFV 32 LG40	40
with one or two levers and gasket, top entry, without adaptor *	CFV 32 G	36	MFV 32 G40	40				
with levers and gasket, top entry, without adaptor *	CFV 32 G42	42	MFV 32 G50	50				


\* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

dimensions in mm


CHO/CFO and MHO/MFO



CHV/CFV and MHV/MFV

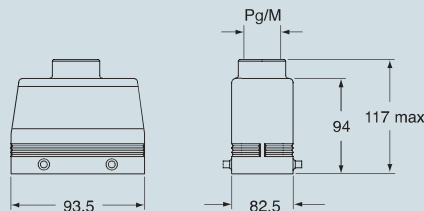


CHV/CFV G and MHV/MFV G

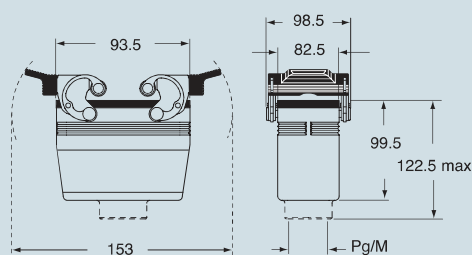


dimensions in mm


CHO/CFO L and MHO/MFO L

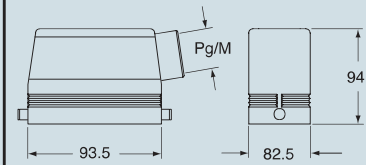

CHV/CFV L and MHV/MFV L

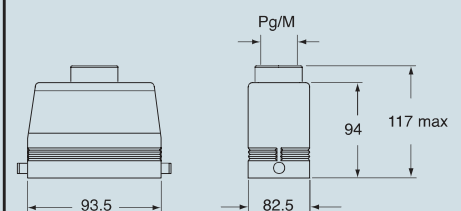

CHV/CFV LG and MHV/MFV LG

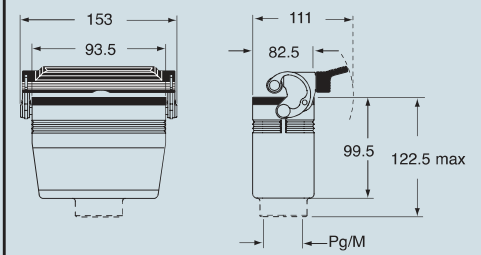

dimensions indicated are not binding and may be changed without notice

size 77.62



inserts:		page
CD .....	80 poles + ⊕	46
CDD .....	144 poles + ⊕	59
CQE .....	64 poles + ⊕	78
CN .....	32 poles + ⊕	84
CCE .....	32 poles + ⊕	94
CNE, CSE.....	32 poles + ⊕	95
CSS .....	32 poles + ⊕	102
CMSE .....	12+4 (aux) poles + ⊕	120
CMCE .....	12+4 (aux) poles + ⊕	120
CME .....	12+4 (aux) poles + ⊕	121
CP.....	12 poles + ⊕	128
MIXO .....	4 + 4 modules	137÷151

insert centre distance: 2 x (77.5 x 27) mm

The covers for C, G and LG versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

hoods with 2 levers



covers



description	part No.	entry Pg	part No.	entry M	part No.
with levers, side entry <sup>1)</sup>	<b>CHO 32 X</b>	36	<b>MHO 32 X40</b>	40	
with levers, side entry, without adaptor * <sup>1)</sup>	<b>CFO 32 X</b>	36	<b>MFO 32 X40</b>	40	
with levers, top entry <sup>1)</sup>	<b>CHV 32 X</b>	36	<b>MHV 32 X40</b>	40	
with levers, top entry, without adaptor * <sup>1)</sup>	<b>CFV 32 X</b>	36	<b>MFV 32 X40</b>	40	
with 4 pegs (for enclosures with 2 levers with gasket) with 4 pegs and gasket (for enclosures with 2 levers) <sup>2)</sup> with 2 pegs (for enclosures with 1 lever with gasket)					<b>CHC 32</b> <b>CHC 32 C</b> <b>CHC 32 L</b>
with 2 levers (for hoods with 4 pegs) with 1 lever (for hoods with 2 pegs)					<b>CHC 32 G</b> <b>CHC 32 LG</b>


\* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

<sup>1)</sup> May be combined with CHI 32 CS housings


<sup>2)</sup> May be combined with hoods:  
- CHO/CFO 32 X and CHV/CFV 32 X  
- MHO/MFO 32 X and MHV/MFV 32 X

dimensions in mm

CHO/CFO X and MHO/MFO X

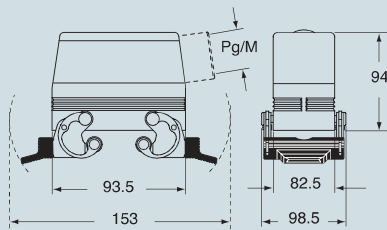

CHV/CFV X and MHV/MFV X

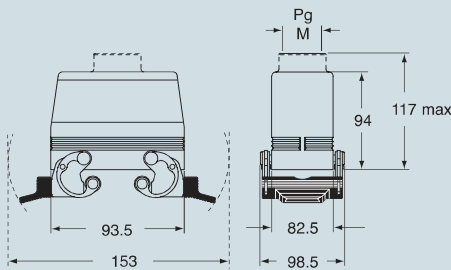

dimensions in mm


CHC




CHC C




CHC L



CHC G



CHC LG



**CAUS**® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 77.62