


KD CONNECTORS [MIL-DTL-5015]

▶ Accessory / 부속품

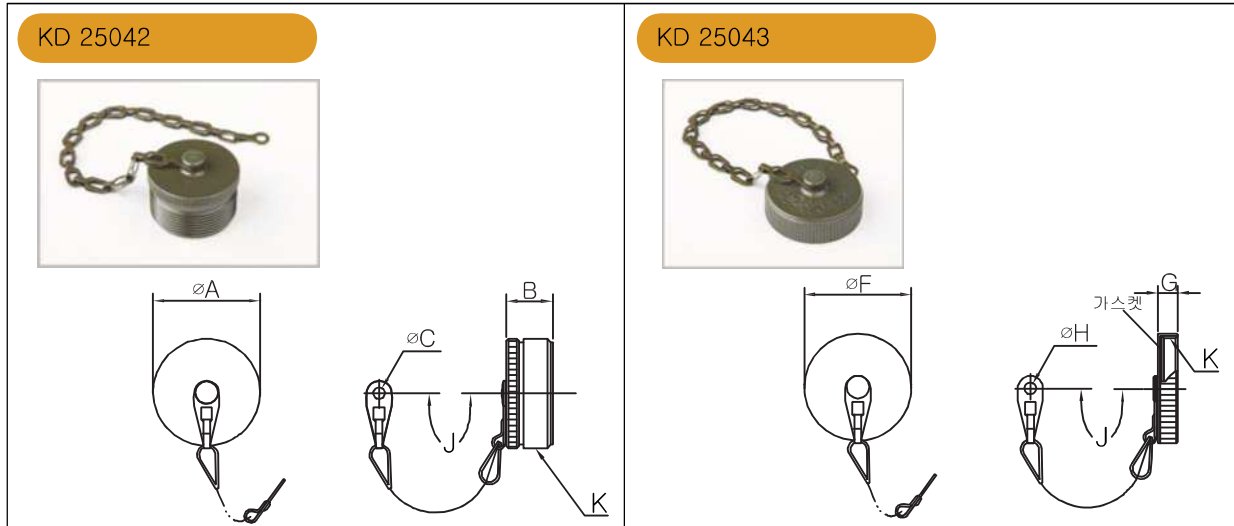

Dash No.	Shell SIZE		ØA MAX	B MAX	ØC +.010 -.005 (+0.25) (-0.12)	ØF MAX	G MAX	ØH +.010 -.005 (+0.25) (-0.12)	J MAX	K Thread (-2A, -2B)
	MS 25042	MS 25043								
- 10D	10SL		.687 (17.45)	.656 (16.66)	.156 (3.96)	.815 (20.70)	.469 (11.91)	.140 (3.56)	4.00 (101.6)	5/8-24UNEF
- 12D	12S, 12		.812 (20.62)	.908 (21.44)	.156 (3.96)	1.000 (25.40)	.469 (11.91)	.140 (3.56)	4.50 (101.6)	3/4-20UNEF
- 14D	14S, 14		.937 (23.80)	.908 (21.44)	.156 (3.96)	1.125 (28.58)	.469 (11.91)	.140 (3.56)	4.50 (101.6)	7/8-20UNEF
- 16D	16S, 16		1.062 (26.97)	.908 (21.44)	.156 (11.91)	1.188 (30.18)	.469 (11.91)	.140 (3.56)	4.50 (101.6)	1-20UNEF
- 18D	18		1.187 (30.15)	.908 (21.44)	.156 (3.96)	1.344 (34.13)	.469 (11.91)	.140 (3.56)	4.50 (101.6)	1 1/8-18UNEF
- 20D	20		1.312 (33.32)	.908 (21.44)	.187 (4.75)	1.469 (37.31)	.469 (11.91)	.140 (3.56)	5.00 (127.0)	1 1/4-18UNEF
- 22D	22		1.437 (36.50)	.908 (21.44)	.187 (4.75)	1.594 (40.49)	.469 (11.91)	.140 (3.56)	5.00 (127.0)	1 3/8-18UNEF
- 24D	24		1.562 (39.67)	.908 (21.44)	.187 (4.75)	1.719 (43.66)	.469 (11.91)	.171 (4.34)	5.50 (139.7)	1 1/2-18UNEF
- 28D	28		1.812 (46.02)	.908 (21.44)	.187 (4.75)	1.969 (50.01)	.531 (13.49)	.171 (4.34)	7.75 (196.9)	1 3/4-18UNS
- 32D	32		2.062 (52.37)	.908 (21.44)	.218 (5.54)	2.219 (56.36)	.531 (13.49)	.187 (4.75)	7.75 (196.9)	2-18UNS
- 36D	36		2.312 (58.72)	.908 (21.44)	.218 (5.54)	2.469 (62.71)	.531 (13.49)	.187 (4.75)	7.75 (196.9)	2 1/4-16UN

inch
(mm)